

Section 8

Packaging Machinery

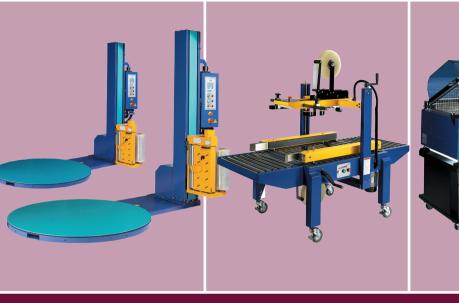

Contents

- Stretch Wrap Machiery.....206 – 209
- Strapping
 Machinery.....210 215
- Shrink Wrap Machines.....216 – 217
- Carton Sealing
 Machines.....218 219
- Paper Banding
 Machine.....220

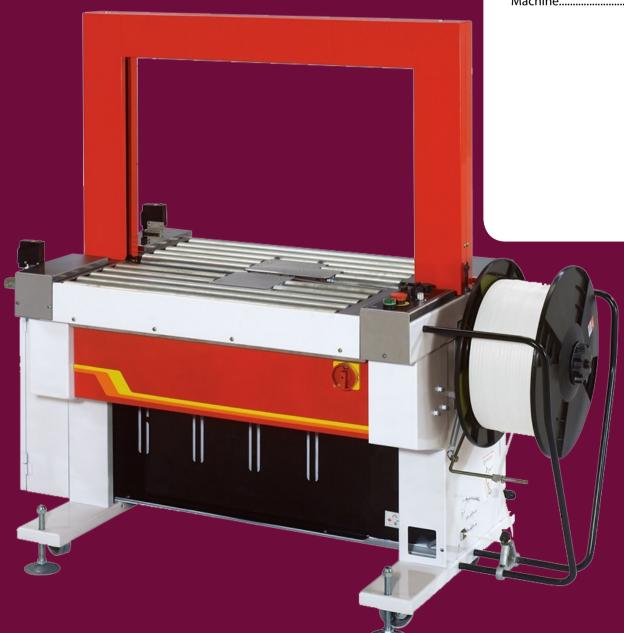







Extend EXP108 Semi-Automatic Stretch Wrap Machine

- Made in Taiwan
- Maximum Pallet Dimensions -1200mm x 1200mm x 2500mm H
- Maximum Pallet Weight 2000kg
- Power Supply Single phase 240V 50Hz
- Designed and manufactured to the highest quality standards
- Power pre-stretch system 300%
- 3 program memory set with operators requirements
- black & clear film
- turntable speed/carriage speed
- Slow start and stop



Extend EXP108W Semi-Automatic Stretch Wrap Machine C/W digital Scales

- Digital weigh scales in KG and LBS
- Maximum Pallet Dimensions 1200mm x 1200mm x 2500mm H
- Maximum Pallet Weight 2000kg
- Power Supply Single phase 240V 50Hz
- Designed and manufactured to the highest quality standards
- Power pre-stretch system 300%
- 3 program memory set with operators requirements
- Height seeking by photo sensor for black & clear film
- Adjustable Wrapping tension, turntable speed & carriage speed





Extend EXP308 (2.5m Mast) Semi-Automatic Stretch Wrap Machine

Semi-Automatic Stretch-Wrap Machine with Disc Brake Pre-Stretch

Model - EXP-308 - 2.5m Mast

Country of Manufacture - Taiwan

Maximum Pallet Dimensions - 1200mm x 1200mm x 2000mm H

Maximum Pallet Weight - 2000 kg

Power Supply – Single phase 240V 50Hz

Features

- Slow start and stop
- Brake disc stretch type
- 3 program memory set with operator's requirements
- Height seeking by photo sensor for black and clear film
- Wrapping tension/turntable speed, carriage speed adjustable
- · Troubleshooting shown on screen
- Top/Bottom wrapping number selection









Lantech Q300 Semi-Automatic Stretch Wrap Machine

- Made in the USA
- Maximum Pallet Dimensions 1200mm x 1200mm x 2000mm H (wrapping height)
- 2800mm Height also available
- · Heavy duty design and construction
- Larger diameter turntable as standard; minimal pallet overhang means extra operator safety
- Pre-stretch rollers with fixed percentage.
 Possible pre-stretch 200%
- · Rotary speed for plated is adjustable via inverter
- Soft start and stop turntable
- Top and bottom reinforcing layers
- Automatic load height detection by photocell
- Low maintenance model
- Power Supply 220V 50/60 Cycle 1 Phase








Lantech Q-300XT Semi-Automatic Stretch Wrap Machine

- Made in the USA
- Automatically attaches and cuts the film, allowing the forktruck operator to simply place the load on the turntable and pull the lanyard switch to start the machine
- Peak Production Speed Up to 30 loads/hr
- Maximum Load Height 75"
- Maximum Load Weight 4000 lbs
- Automatic film cut & clamp
- Eliminates wasted operator time getting on and off the fork truck
- Reduces risk of injuries

















GPS1 Semi-Automatic Strapping Machine

- Dimensions 895mm W x 565mm D x 735mm H
- Strap Coil Size 200mm. Optional: 230mm or 280mm
- Strapping Speed 1.5 sec / strap
- Maximum tension 45kg
- Box type construction for maximum rigidity and stability
- Patented compression strap dispenser
- · Heavy duty design and construction
- Automatic motor cut out when machine is not in use
- Die cast heating blade
- Modern, ergonomic design
- Tension control indicator
- Heavy duty, stainless steel hinged lid
- Instant heat-up time
- Mobile, for use in different locations
- Stainless body model
- Solid State Electrics



GPS1-SS Stainless Body Semi-Automatic Strapping Machine

- Dimension 895mm W x 565mm D x 735mm H
- Strap Coil Size 200mm. Optional: 230mm or 280mm
- Strapping Speed 1.5 sec / strap
- Maximum tension 45kg
- Heavy duty design and construction
- · Automatic motor cut out when machine is not in use
- Die cast heating blade
- Modern, ergonomic design
- Tension control indicator
- · Heavy duty, stainless steel hinged lid
- Instant heat-up time
- Mobile, for use in different locations
- Stainless body model
- Solid State Electrics





Extend ES104 Semi Automatic Strapping Machine

- Manufactured in Taiwan
- Power Supply Single Phase 240V 50Hz
- Strap 9mm 12mm
- Rugged and reliable design and construction
- Automatic motor cut out when machine not in use
- External tension dial for easy adjustment
- · Tension control indicator
- Heavy duty, stainless steel hinged lid
- Short heat up time
- · Mobile, for use in different locations
- · Simple strap threading and operation
- Low maintenance model



GPA101SH Stainless High Speed Automatic Strapping Machine

- Made in Taiwan
- Arch Size: 850 W X 600 H
- Rugged and reliable design and construction
- Speed 50 straps per minute
- Models available for 9mm 15mm PP strap
- Operated by hand, foot or table sensor
- Mechanical tension adjustment 10-80 kg
- Stainless steel body & lid with idle rollers
- Simple strap threading and operation
- PLC control provides consistent performance and lower maintenance
- Low maintenance model
- Weight 180 kg











GPA101 Automatic Strapping Machine



- Rugged and reliable design and construction
- Speed 30 straps per minute
- Models available for 9mm 15mm PP strap
- Operated by hand, foot or table sensor
- Mechanical tension adjustment 10-80 kg
- Stainless steel lid with idle rollers
- Simple strap threading and operation
- PLC control provides consistent performance and lower maintenance
- Low maintenance model
- Weight 180 kg





Transpak TP601D 12mm Automatic Strapping Machine



- 12mm High-Speed Automatic Strapping Machine
- Arch Size W 850mm x H 600mm. Other non-standard arch sizes are available
- Strap Set for 12mm
- Modern ergonomic design
- Simple to operate, maintain and manoeuvre
- Strapping cycle: over 30 straps per minute
- External Strap Tension adjustment 7-70 Kg Automatic strap feed
- Automatic loop ejection if operator straps without parcel present
- Auto strap re-feed; machine automatically re-feeds strap if it does not reach the correct position
- Foot Switch













Transpak TP-702 5mm High-Speed Automatic Strapping Machine



- Arch Size W 550mm x H 400mm. Other non-standard arch sizes are available at additional cost, if required
- Strap Set for 5mm
- Modern ergonomic design
- Simple to operate, maintain and manoeuvre
- Very high-speed strapping cycle: Up to 65 straps per minute
- External Strap Tension adjustment 1- 45 Kg
- Automatic strap feed
- Adjustable table height. 820mm to 920mm
- Automatic loop ejection if operator straps without parcel present
- Auto strap re-feed; machine automatically re-feeds strap if it does not reach the correct position
- Foot Bar Switch Unit on both sides
- Maximum package weight of 40kg
- Core diameters of 150mm & 250mm
- · Otherwise, as per enclosed brochure







Features

- Made in Japan
- Arch Size W800mm x H600mm
- Cassette strap loading system for simple coil-change
- Operated by hand, table roller or foot pedal control
- Internal dispenser for safety and minimum space requirements
- Optional spare strap cassette available
- Automatic motor cut-out when not in use
- Anti-strap jamming device
- Automatic strap feed
- High speed, 1.7 seconds per strapping cycle
- When strap runs out any strap left in the arch is discharged automatically to allow fast coil replacement
- Self-diagnostic function with LED display on control panel
- Tension dial for quick and easy adjustment of the tension
- Very strap tolerant
- Simple to operate

Bandamatic F11-A Fully Automatic Strapping Machine

- Fully-Automatic unmanned operation with centralised control panel for easy changing of settings
- Arch Size W930mm x H400mm
- Strap 9, 12 or 15mm Polypropylene
- Belt conveyor table-top
- Internal Cassette style strap dispenser;
 Ideal for use in the meat/fish/poultry industry
- Strapping cycle speed of 1.7 seconds.
- Able to apply 0, 1 or 2 straps per carton
- Simple adjustment for strap position
- Automatic strap feeding; Simple even for inexperienced operators
- Self-diagnostic function with LED display
- · Simple tension adjustment
- Low maintenance model.











Shrink Wrap Machines

Extend EKH-346 Chamber Shrink Wrap Machine



- Made in Taiwan
- Sealing Dimension 320mm x 460mm
- Simultaneous film sealing and shrinking under transparent hood
- Hood closed by way of electronic hold down magnet during cycle
- · Times and temperatures controlled by microprocessor
- Micro perforator for film, to help excess air escape
- Adjustable sealing height
- Low power consumption
- · Heavy duty ceramic cutter holder; more durable and long lasting
- Machine stand, mounted on castors, for easy machine relocation
- Electronic production counter
- Adjustable packing tray





Shrink Wrap Machines

Extend EKH-455 Chamber Shrink-Wrap Machine



- Made in Taiwan
- Sealing dimension: 420mm x 550mm
- Simultaneous film sealing and shrinking under transparent hood
- Hood closed by way of electronic hold down magnet during cycle
- Times and temperatures controlled by microprocessor
- Micro perforator for film, to help excess air escape
- Adjustable sealing height
- Low power consumption
- Heavy duty ceramic cutter holder; more durable and long lasting
- Machine stand, mounted on castors, for easy machine relocation
- Electronic production counter
- Adjustable packing tray















Carton Sealing Machines

Extend EXC-103SD Uniform Carton Sealing Machine

- Manufactured in Taiwan
- Carton Capacity: L 120mm Unlimited.
 W 110mm 800mm. H 120mm 600mm
- Speed: 23 metres per minute
- Designed and manufactured to the highest quality standards
- Side drive belts, driven by a motor on each side
- Top and bottom taping
- Manual adjustment for height and width
- Quiet operation
- Adjustable leg height



Extend EXC-103SDS Stainless Steel Uniform Carton Sealing Machine

- Manufactured in Taiwan
- Carton Capacity:
 L 120mm Unlimited.
 W 110mm 800mm.
 H 120mm 600mm
- Speed: 23 metres per minute
- Designed and manufactured to the highest quality standards
- Side drive belts, driven by a motor on each side
- Top and bottom taping
- · Manual adjustment for height and width
- Quiet operation
- Adjustable leg height





Carton Sealing Machines





Features

- Carton capacity:
 - L 120mm unlimited
 - W 100mm-610mm
 - H 130mm-610mm
- Speed: 23 metres per minute
- Designed and manufactured to the highest quality standards
- Side drive belts, driven by a motor on each side
- Automatic top and bottom taping
- Automatic adjustment for height and width
- Quiet operation
- Adjustable leg height
- Removable in feed and out feed conveyors
- 6 bar air minimum required











Paper Banding Machine

Akebono OB 360 Paper & Film Tape Banding Machine



- High speed paper and film tape banding machine
- Up to 30 cycles/ minute
- Push Button or Foot Pedal operation
- 30 to 480mm wide banding
- Adjustable Tension (from 5 to 30N)
- Impeccable Sealing Technology
- For use in a variety of food and non-food industries including printing & graphics, banking and pharmaceutical
- available with a conveyor belt to adapt to fully automatic lines



Optional jumbo dispenser.

